


Fitting Ends Per AS33514-6

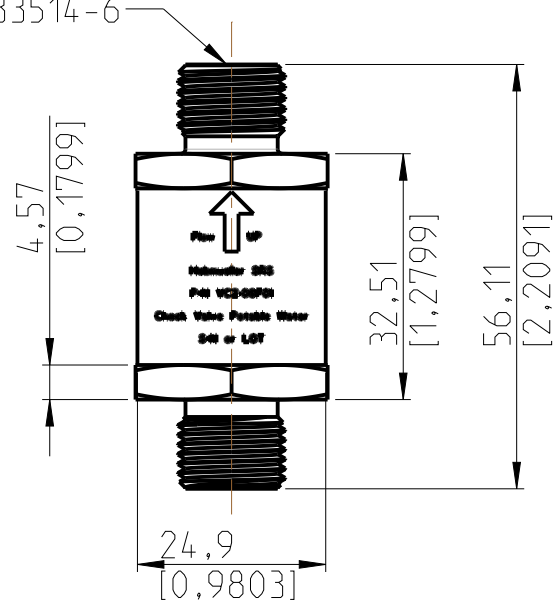

NOTES:

1. FLUID MEDIA = POTABLE WATER
2. TEMPERATURE RATING = OPERATING = +1°C to +70°C  
STORAGE = -55°C to +85°C
3. PRESSURE RATING; OPERATING = 0 to 125 PSI  
PROOF = 188 PSI  
BURST = 250 PSI
4. MATERIAL; O-RINGS = NSF61  
ALL OTHER PARTS = 300 SERIES CRES PASSIVATED
5. EXTERNAL LEAKAGE = 0 FROM 0 TO 250 PSI
6. INTERNAL LEAKAGE = 0 FROM 0 TO 250 PSI
7. WEIGHT = 111 GRAMS MAX
8. FLOW RATE; 1.6 GPM @ 1 PSI WATER
9. ELECTROETCH 2 FLOW ARROWS 180° APART AND;  
HEBMÜLLER SRS  
CHECK VALVE  
PN VC2-06F01  
SN optional

Als Betriebsgeheimnis anvertraut.  
 Alle Rechte vorbehalten.  
 PROPRIETARY DATA - COMPANY CONFIDENTIAL.  
 ALL RIGHTS RESERVED

200116		Allgemeintol. Tolerances DIN ISO 2768 mittel/middle		Oberfläche Surface DIN ISO 1302		Massstab/SCALE 1:1		Gewicht/WEIGHT 0.079	
						Werkstoff/MATERIAL: -			
						Halbzeug: -			
						Benennung/TITLE			
		Bearb. Drawn		Datum/DATE		Name			
		06/19/09		AL		CHECK VALVE VC2-06F01			
		Gepr. CHECK		06/16/09		Heb.			
		Norm		-		-			
						POTABLE WATER			
						HEBMÜLLER SRS TECHNIK GmbH		Blatt 1	
						Kaarster Str. 250		2 Bl.	
						41462 Neuss			
a		revised		04/09/12		WI			
Zust. Index		Aenderung/Change		Datum/Date		Name		Ers. fuer/SUBST. FOR :	
								Ers. d./SUBST. FOR :	

