


1

2

3

4

A

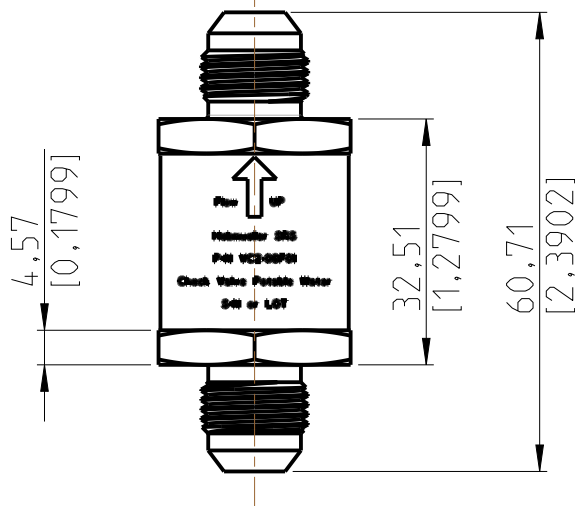

Fitting Ends per  
MS33565-06

NOTES:

1. FLUID MEDIA = POTABLE WATER
2. TEMPERATURE RATING = OPERATING = +1°C to +70°C  
STORAGE = -55°C to +85°C
3. PRESSURE RATING; OPERATING = 0 to 125 PSI  
PROOF = 188 PSI  
BURST = 250 PSI
4. MATERIAL; O-RINGS = NSF61  
ALL OTHER PARTS = 300 SERIES CRES PASSIVATED
5. EXTERNAL LEAKAGE = 0 FROM 0 TO 250 PSI
6. INTERNAL LEAKAGE = 0 FROM 0 TO 250 PSI
7. WEIGHT = 111 GRAMS MAX
8. FLOW RATE; 1.6 GPM @ 1 PSI WATER
9. ELECTROETCH 2 FLOW ARROWS 180° APART AND;  
HEBMÜLLER SRS  
CHECK VALVE  
PN VC2-06T01  
SN optional

B

C

D

E

Als Betriebsgeheimnis anvertraut.  
Alle Rechte vorbehalten.  
PROPRIETARY DATA - COMPANY CONFIDENTIAL.  
ALL RIGHTS RESERVED

200112		Allgemeintol. Tolerances DIN ISO 2768 mittel/middle		Oberfläche Surface DIN ISO 1302		Massstab/SCALE 1:1		Gewicht/WEIGHT 0.084	
		Datum/DATE		Name		Werkstoff/MATERIAL: -		Halbzeug: -	
		Bearb. Drawn		06/01/11		AL		Benennung/TITLE	
		Gepr. CHECK		06/05/11		Otterbein		CHECK VALVE VC2-06T01	
		Norm		-		-		POTABLE WATER	
								HEBMÜLLER SRS TECHNIK GmbH	
								Kaarster Str. 250	
								41462 Neuss	
a		revised		04/09/12		W I		Blatt 1	
Zust. Index		Aenderung/Change		Datum/Date		Name		Ers. fuer/SUBST. FOR :	
								Ers. d./SUBST. FOR :	
								2 Bl.	

**Hebmüller**  
SRS-TECHNIK  
SPECIALTY IN DESIGN & MANUFACTURE