


Als Betriebsgeheimnis anvertraut.  
 Alle Rechte vorbehalten.  
 PROPRIETARY DATA - COMPANY CONFIDENTIAL.  
 ALL RIGHTS RESERVED

A  
 B  
 C  
 D  
 E

Fitting Ends Per MS33656-8  
 3/4-16UNF-3A

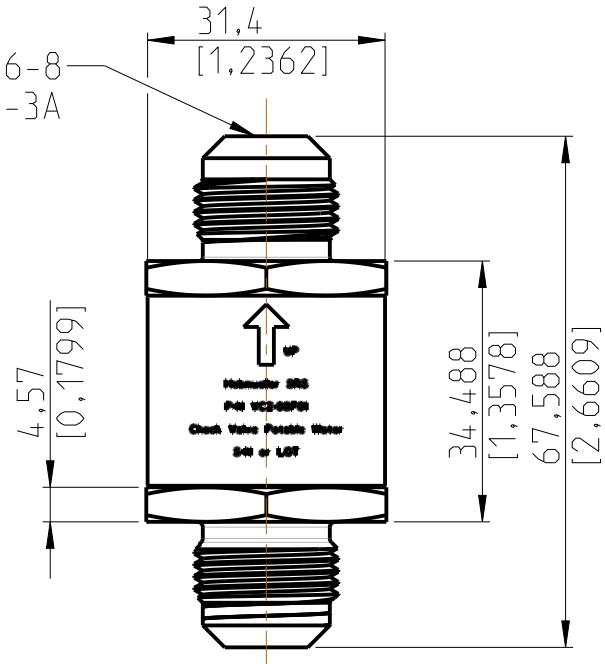

NOTES:

1. FLUID MEDIA : POTABLE WATER
2. PRESSURE RATING: OPERATING, 0 TO 125 PSIG  
 PROOF, 250 PSIG
3. TEMPERATURE RANGE: OPERATING = +32 °F TO +160 °F  
 STORAGE = -65 °F TO +160 °F
4. CRACK PRESSURE: 0.8 INCHES OF WATER COLUMN MAX  
 IN HORIZONTAL POSITION
5. LEACKAGE: NIL INTERNAL FROM 1 TO 250 PSI  
 NIL EXTERNAL 0 TO 250 PSI
6. MATERIAL: SEALS = EPDM TO NSF61  
 ALL OTHER = 300 SERIES CRES, PASSIVATED
7. LUBRICATE SEALS AND THREADS WITH KRYTOX 240 AC
8. ELECTRICAL BONDING: 20 MILLIOHMS MAX
9. WEIGHT = 0.15 kg MAX
10. ELECTRO CHEM ETCH 2 ARROWS 180 ° APART ON BODY &:  
 HEBMÜLLER SRS Technik GmbH  
 CHECK VALVE  
 POTABLE WATER  
 P/N VC2-08T01  
 S/N optional

200113		Allgemeintol. Tolerances DIN ISO 2768 mittel/middle		Oberfläche Surface DIN ISO 1302		Massstab/SCALE 1:1		Gewicht/WEIGHT 0.166	
		Datum/DATE		Name		Werkstoff/MATERIAL: -		Halbzeug: -	
		Bearb. Drawn		06/01/11		AL		Benennung/TITLE	
		Gepr. CHECK		06/02/11		OtteG		CHECK VALVE VC2-08T01	
		Norm		-		-		POTABLE WATER	
								HEBMÜLLER SRS TECHNIK GmbH	
								Kaarster Str. 250	
								41462 Neuss	
a		revised		27/08/12		W I		Blatt 1	
Zust. Index		Aenderung/Change		Datum/Date		Name		2 Bl.	
								Ers. fuer/SUBST. FOR :	
								Ers. d./SUBST. FOR :	

